




3 LAYER AND 3 COLORS

BASIC SERIES


MODEL NO
NB1T

DRAWING

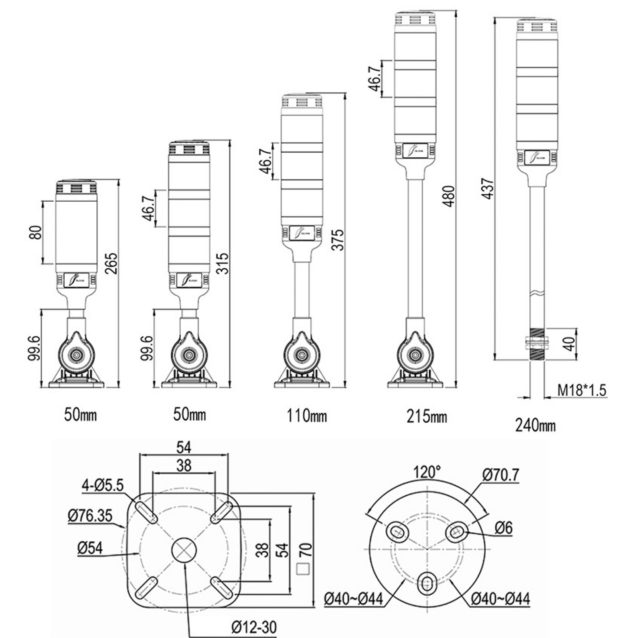


Four hole base (standard) Three hole base (optional)

WIRING DIAGRAM

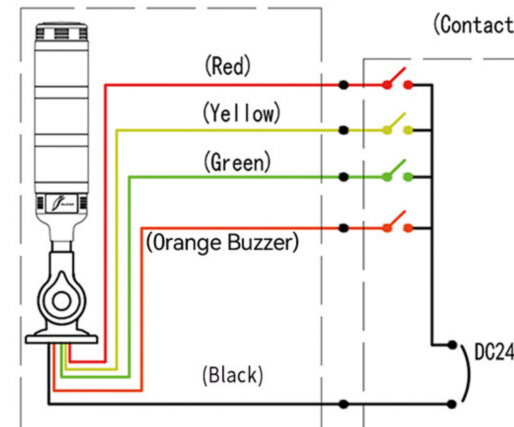

DC24V NPN/PNP

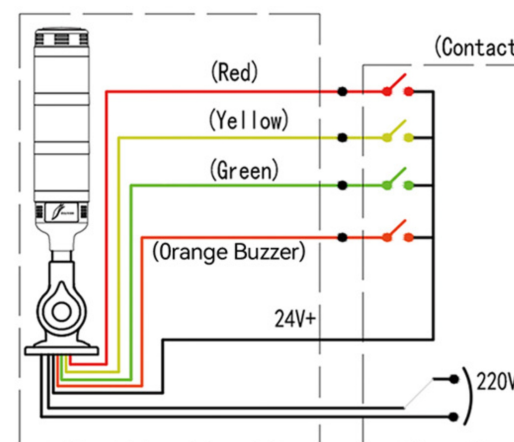

220V (Contact type)

TECHNICAL PARAMETERS

Current	One color: 80mA, Buzzer: 45mA
Flash Frequency	60-70 Hz/min
Buzzer Volume	>95dB
IP Rating	IP64 (with buzzer)
Temperature	<60C°
Life	50.000H
Color	White, Black
Installation	Fixed by screw
Material	Body: ABS, Lens: PC, Base: ABS

CODING PRINCIPLE

NILE BHARAT-NB1T	1	A	02	F	T	RYG	50	W
1	2	3	4	5	6	7	8	9

1 Model No	NB1T
2 Layer	1. Three-layer
3 Mounting	A. Collapsible E. Threaded rod installation
4 Voltage	01. DC24V 02.AC220V
5 Function	B. Steady S. Red flash F. Steady with buzzer C. Red flash with buzzer
6 Connect type	T. PNP&NPN C. Contact type
7 Color	R. Red Y. Yellow G. Green
8 Diameter	50. φ50mm
9 Light Body	W. White B. Black