




SINGLE LAYER TRICOLORS


BASIC SERIES

MODEL NO
NB1TS


DRAWING

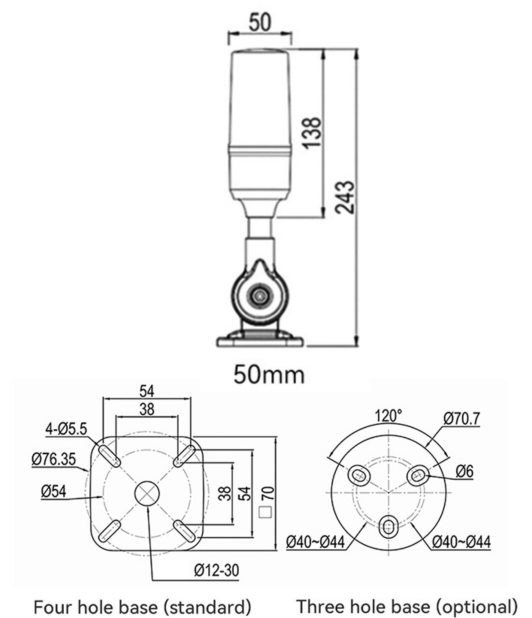

WIRING DIAGRAM

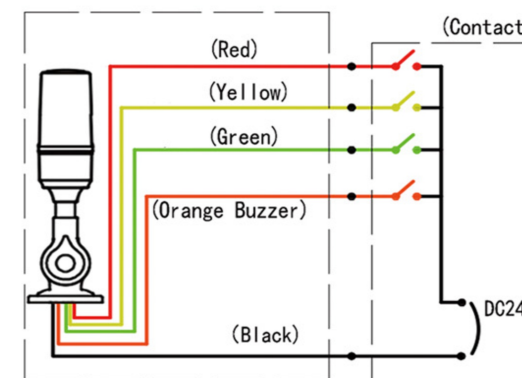

DC24V NPN/PNP

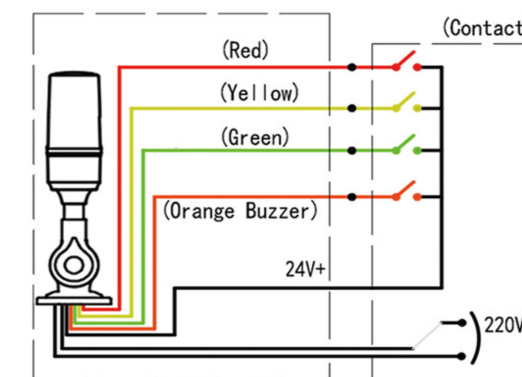


220V (Contact type)

TECHNICAL PARAMETERS

Current	One color: 80mA, Buzzer: 45mA
Flash Frequency	60-70 Hz/min
Buzzer Volume	>95dB
IP Rating	IP65 (with buzzer) / IP65 (without buzzer)
Temperature	<60C°
Life	50.000H
Color	White, Black
Installation	Fixed by screw
Material	Body: ABS, Lens: PC, Base: ABS

CODING PRINCIPLE



1	Model No	NB1TS
2	Layer	1. one-layer with 3 Colors
3	Mounting	A. Foldable type C. Pople plate type E. Threaded road installation
4	Voltage	01. DC12V 02. DC24V 03. AC220V
5	Function	B. Steady F. Steady with buzzer
6	Connect Tyle	T. PNP&NPN C. Contact type
7	Color	R. Red Y. Yellow G. Green
8	Diameter	50. ϕ50mm
9	Light Body	W. White B. Black