



NILE BHARAT
MAKE FOR WORLD




SINGLE LAYER TRICOLORS

BASIC SERIES


MODEL NO
NB3T/NB3T-X

DRAWING

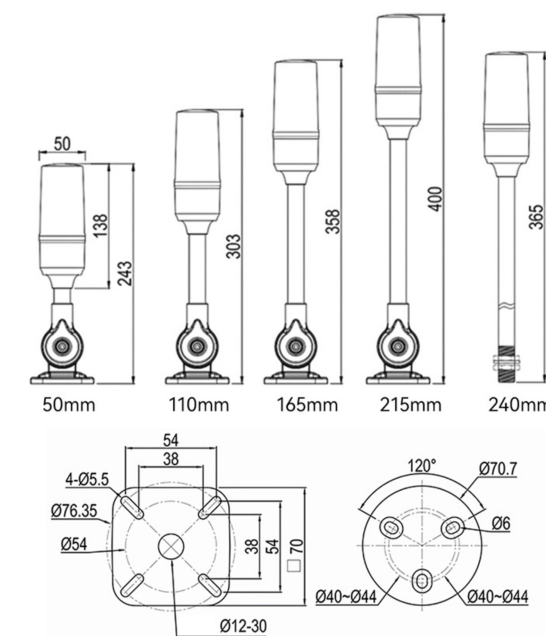


Four hole base (standard) Three hole base (optional)

WIRING DIAGRAM

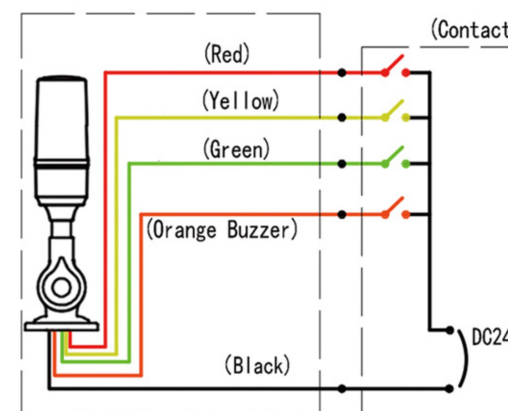

DC24V NPN/PNP

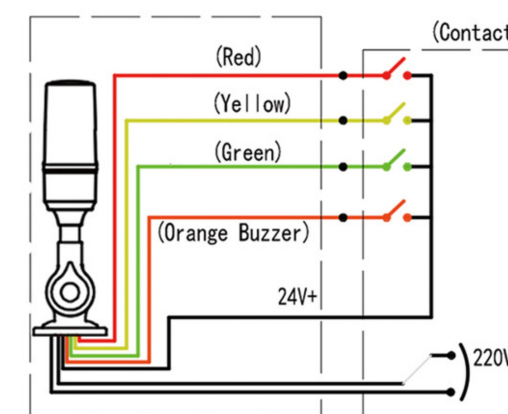


220V (Contact type)

TECHNICAL PARAMETERS

Current	One color: 50mA, Buzzer: 15mA
Flash Frequency	60-70 Hz/min
Buzzer Volume	>95dB
IP Rating	IP53 (with buzzer) / IP65 (without buzzer)
Temperature	<60C°
Life	50.000H
Color	White, Black
Installation	Fixed by screw
Material	Body: ABS, Lens: PC, Base: ABS

CODING PRINCIPLE



1	Model No	NB3T / NB3T-X
2	Layer	1. one-layer
3	Mounting	A. Foldable type C. Pople plate type E. Threaded road installation
4	Voltage	01. DC24V 02. AC220V
5	Function	B. Steady F. Steady with buzzer
6	Connect Tyle	T. PNP&NPN C. Contact type
7	Color	R. Red Y. Yellow G. Green
8	Diameter	50. φ50mm
9	Light Body	W. White B. Black