




PREMIUM SERIES

MODEL NO
NBP-4


DRAWING




SILVER BASE

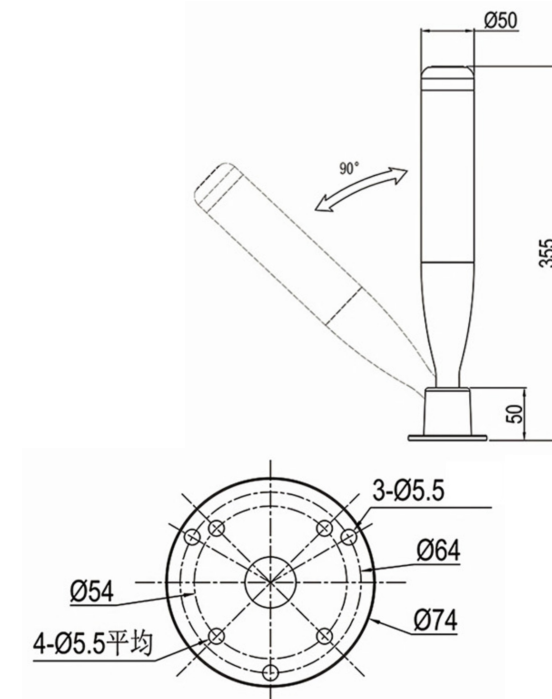

WIRING DIAGRAM

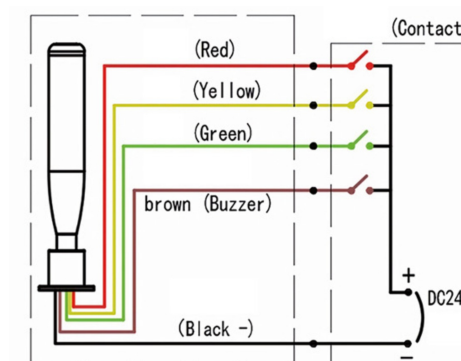

DC24V PNP(Common -)(Constant brightness type)

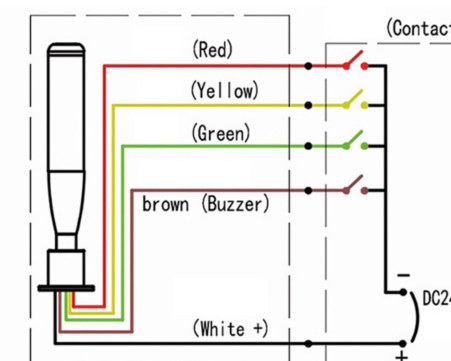


DC24V NPN(Common+)(Constant brightness type)

TECHNICAL PARAMETERS

Current	One color: 100mA, Buzzer: 15mA
Flash Frequency	60-70 Hz/min
Buzzer Volume	>95dB
IP Rating	IP54 (with buzzer) / IP54 (without buzzer)
Temperature	<60C°
Life	50.000H
Color	Silver
Installation	Fixed by screw
Material	Body: AL Lens: PC

CODING PRINCIPLE



1 Model No	NBP-4
2 Layer	1. one-layer with three colours
3 Mounting	A. Foldable Type
4 Voltage	01. DC24V
5 Function	B. Steady F. Steady with buzzer
6 Connect type	T. PNP&NPN
7 Color	R. Red Y. Yellow G. Green