




PREMIUM SERIES

MODEL NO
NBP-6S


DRAWING



SILVER BASE

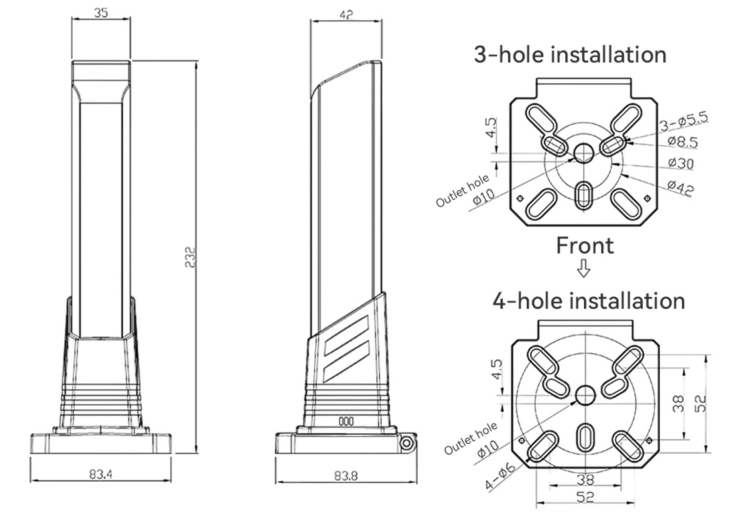


WIRING DIAGRAM

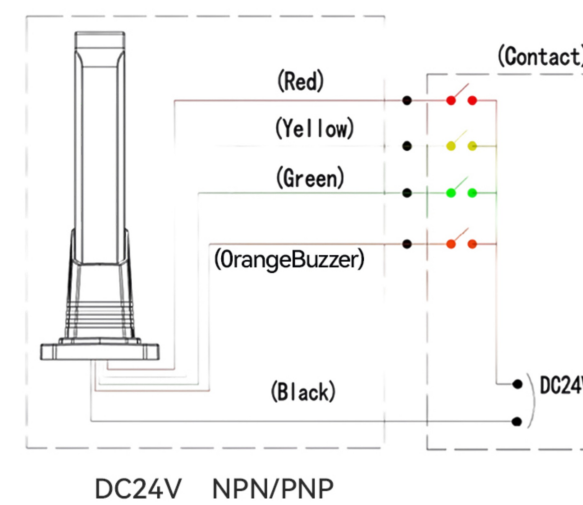

TECHNICAL PARAMETERS

Current	One color: 50mA, Buzzer: 25mA
Flash Frequency	60-70 Hz/min
Buzzer Volume	>95dB
IP Rating	IP54 (with buzzer) / IP54 (without buzzer)
Temperature	<60C°
Life	50.000H
Color	Silver
Installation	Fixed by screw
Material	Lens: PMMA, Base: ABS

CODING PRINCIPLE



1 Model No	NBP-6S
2 Layer	1. one-layer with three colours
3 Mounting	A. Foldable Type
4 Voltage	01. DC24V
5 Function	B. Steady F. Steady with buzzer
6 Connect type	T. PNP&NPN
7 Color	R. Red Y. Yellow G. Green