




φ60mm


BASIC SERIES

MODEL NO
NBQ160

DRAWING

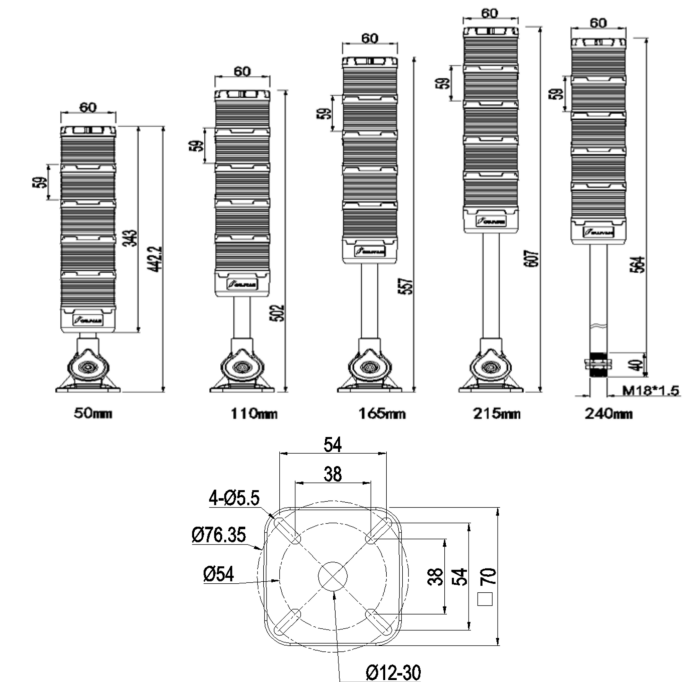


WIRING DIAGRAM

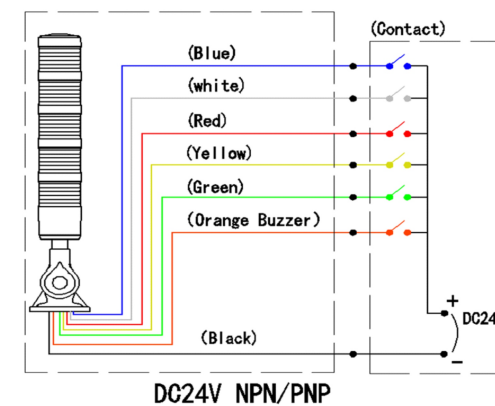

TECHNICAL PARAMETERS

PRODUCT	MODEL
INPUT VOLTAGE	DC24V
IP RATING	IP54
LAMP BEADS	2,835 bead
BUZZER	>95dB
LUMINESCENCE	360°
ANGLE	
TECHNICAL	CE
CERTIFICATION	

CODING PRINCIPLE



ENVIRONMENTAL REQUIREMENTS

Ambient temperature:	-20~45c
Storage temperature:	-40~70c
Ambient humidity:	10~90%
Storage humidity:	10~90%

1 Model:	Q1-60
2 Colorlayer:	1. 5layers
3 Mounting:	A. Collapsible E, thread installation
4 Voltage:	02-DC24 03-AC220V
5 Function:	B. Steady light, F. Steady light with buzzer
6 Connection:	T. PNP/NPN
7 Light color:	R:Red Y: yellow G:Green B:Blue W:White
8 Diameter	φ60mm
9 Rod length	50mm
10 Color :	Black