

NB_RGB Indicator



WIRE DIRECT OUTLET STANDARD




WITH M12 CONNECTOR


BASIC SERIES

MODEL NO
NBV

DRAWING

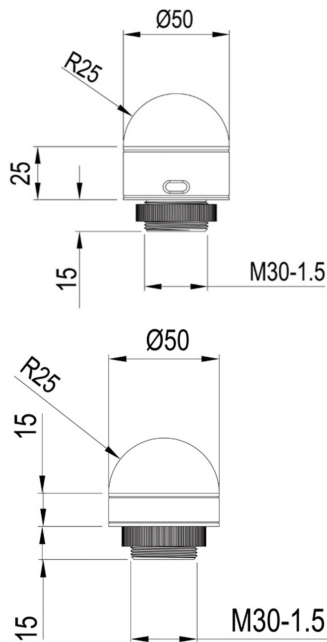


WIRING DIAGRAM

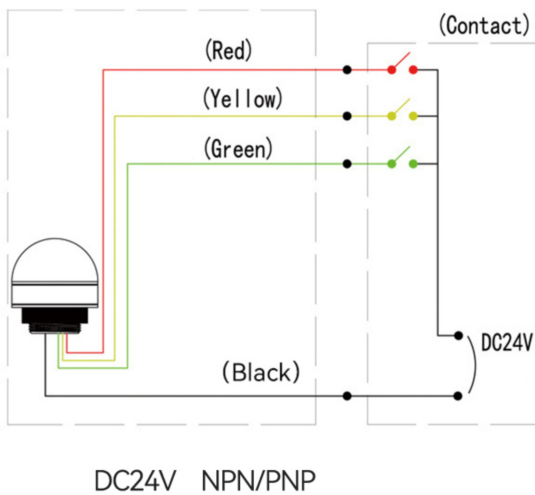

TECHNICAL PARAMETERS

Current	One color: 50mA, Buzzer: 15mA
Flash Frequency	60-70 Hz/min
Buzzer Volume	>95dB
IP Rating	IP65 (with buzzer) / IP65 (without buzzer)
Temperature	<60C°
Life	50.000H
Color	Black
Installation	Fixed by screw
Material	Body: AL, Lens: PMMA

CODING PRINCIPLE



1 Model No	NBV
2 Layer	1. one-layer
3 Mounting	E. Threaded rod installation
4 Voltage	01. DC24V
5 Function	B. Steady F. Steady with buzzer
6 Connect type	T. PNP&NPN
7 Color	R. Red Y. Yellow G. Green
8 Diameter	50. φ50mm
9 Light Body	B. Black